

Guarantee

Subject to the conditions stated below, Mutant (Autoleads Ltd) guarantees this equipment through its authorised dealerships against defects in workmanship or materials of its mechanical and electronic component parts for the period of one year from the date of purchase. This does not affect your statutory rights

Conditions

This guarantee is only valid upon production of a valid proof of purchase (receipt). Claims under this guarantee should be made through the authorised dealer from which the equipment was purchased.

This guarantee excludes:

- All damage caused through accident, misuse, wear and tear and installation.
- Any alterations or modifications made to the equipment.

This guarantee does not cover any costs incurred as a result of damage or loss in transit, and is non-transferable from owner to owner.

Date of Purchase

Model Number

Dealer's Stamp

Autoleads Limited Bordon Hampshire GU35 9QE

t: 0800 783 9125 f: 0800 783 9124 w: www.mutant.uk.com

MUTANT X



NW1040X 10" Subwoofer

User Guide

NW1040X 10" Subwoofer

Features

Aluminium Basket

40oz Magnet

400 Watt RMS Power

800 Watt Max Power

32Hz-800Hz Frequency Response

Fs 37Hz

Qts 0.45

Vas 64 Litres

91dB Sensitivity

Hole Cut Sizes


Screw Diameter 8mm

Cut Hole Diameter 252mm

Depth of speaker install 140mm

Dimensions

270mm x 140mm (Diameter x Total Depth)

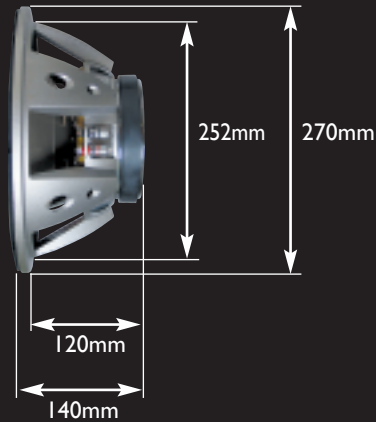


Amplifier Wiring Recommendations

4 Ohm Bridgeable Load



300 Watt RMS Mono to one subwoofer

2 Ohm Bridgeable Load

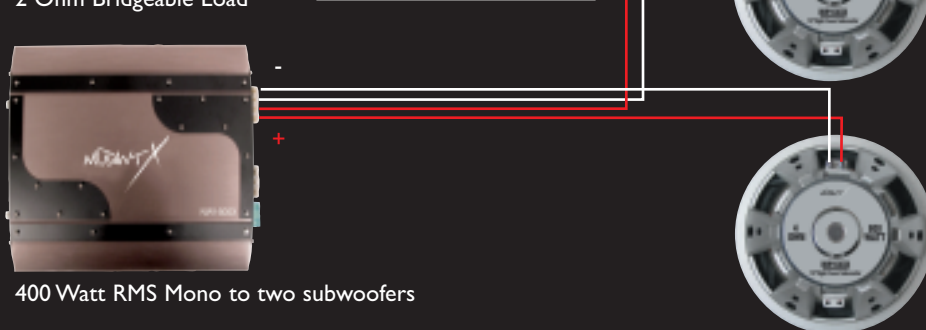

400 Watt RMS Mono to two subwoofers

Mutant NW1600X is recommended for this configuration

Recommended Enclosure Volume

Sealed Enclosure

19mm MDF board (recommended)

0.88 Cu Ft

25 Litres

For best performance fill the enclosure with 50% Speaker box wadding*

Vent Enclosure

19mm MDF board (recommended)

1.41 Cu Ft

40 Litres

Vent Diameter 7.6cm (3") Length 10cm (4")

For best performance fill the enclosure with 10% Speaker box wadding*

*(Part No. K-82 from Autoleads)