

NWI565X 15" Subwoofer

Features

Aluminium Basket

65oz Magnet

600 Watt RMS

1200 Watt Max Power

30-800Hz Frequency Response

Fs 30Hz

Qts 0.45

Vas 98 Litres

93dB Sensitivity

Hole Cut Sizes

Screw Diameter 8mm

Cut Hole Diameter 356mm

Depth of speaker install 163mm

Dimensions

386mm x 175mm (Diameter x Total Depth)



Amplifier Wiring Recommendations


4 Ohm Bridgeable Load



300 Watt RMS Mono to one subwoofer



2 Ohm Bridgeable Load

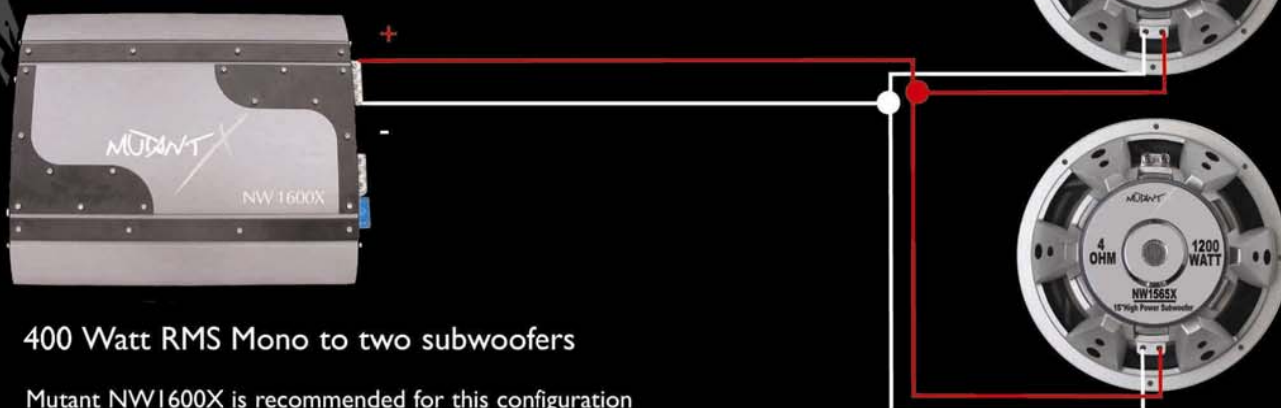

400 Watt RMS Mono to two subwoofers

Mutant NW1600X is recommended for this configuration

Recommended Enclosure Volume

Sealed Enclosure

19mm MDF board (recommended)

1.58 Cu Ft

45 Litres

For best performance fill the enclosure with 50% Speaker box wadding*

Vent Enclosure

19mm MDF board (recommended)

1.41 Cu Ft

40 Litres

Vent Diameter 10cm (4") Length 20cm (8")

For best performance fill the enclosure with 10% Speaker box wadding*

*(Part No. K-820 from Autoleads)